

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPTO)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 891 990 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
20.01.1999 Bulletin 1999/03

(51) Int. Cl.<sup>6</sup>: C08F 10/00, C08F 2/14

(21) Application number: 98113059.4

(22) Date of filing: 14.07.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 15.07.1997 US 893200

(71) Applicant:  
PHILLIPS PETROLEUM COMPANY  
Bartlesville Oklahoma (US)

(72) Inventors:  
• Hottovy, John Douglas  
Bartlesville, Oklahoma 74006 (US)  
• Hensley, Harvey Dean  
Bartlesville, Oklahoma 74006 (US)

• Przelomski, David Joseph  
Houston, Texas 77062 (US)  
• Cymbaluk, Teddy Henry  
Seabrook, Texas 77586 (US)  
• Franklin, Robert Kyle, III  
Houston, Texas 77059 (US)  
• Perex, Ethelwoldo P.  
Sugar Land, Texas 77479 (US)

(74) Representative:  
Dost, Wolfgang, Dr.rer.nat., Dipl.-Chem. et al  
Patent- und Rechtsanwälte  
Bardehle . Pagenberg . Dost . Altenburg .  
Gelssler . Isenbruck  
Galileiplatz 1  
81679 München (DE)

(54) High solids slurry polymerization

(57) An olefin polymerization process wherein monomer, diluent and catalyst are circulated in a continuous loop reactor and product slurry is recovered by means of a continuous product take off. The continuous product allows operating the reaction at significantly higher solids content in the circulating slurry. In a preferred embodiment, the slurry is heated in a flash line heater

and passed to a high pressure flash where a majority of the diluent is separated and thereafter condensed by simple heat exchange, without compression, and thereafter recycled. Also an olefin polymerization process operating at higher reactor solids by virtue of more aggressive circulation.

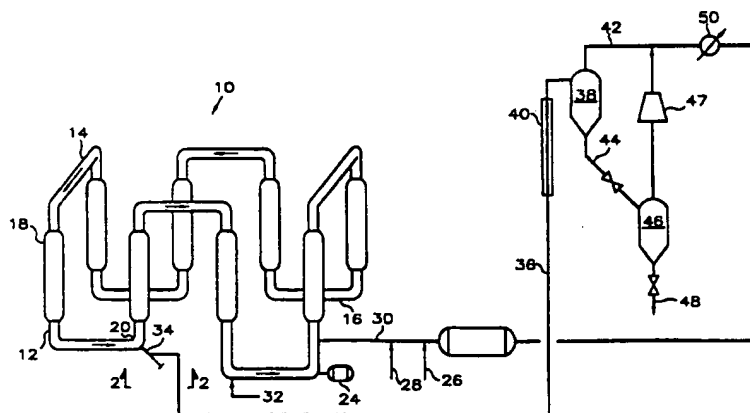


FIG. 1

EP 0 891 990 A2

**Description****BACKGROUND OF THE INVENTION**

5 This invention relates to the polymerization of olefin monomers in a liquid diluent.

Addition polymerizations are frequently carried out in a liquid which is a solvent for the resulting polymer. When high density (linear) ethylene polymers first became commercially available in the 1950's this was the method used. It was soon discovered that a more efficient way to produce such polymers was to carry out the polymerization under slurry conditions. More specifically, the polymerization technique of choice became continuous slurry polymerization in a pipe loop reactor with the product being taken off by means of settling legs which operated on a batch principle to recover product. This technique has enjoyed international success with billions of pounds of ethylene polymers being so produced annually. With this success has come the desirability of building a smaller number of large reactors as opposed to a larger number of small reactors for a given plant capacity.

Settling legs, however, do present two problems. First, they represent the imposition of a "batch" technique onto a basic continuous process. Each time a settling leg reaches the stage where it "dumps" or "fires" accumulated polymer slurry it causes an interference with the flow of slurry in the loop reactor upstream and the recovery system downstream. Also the valve mechanism essential to periodically seal off the settling legs from the reactor upstream and the recovery system downstream requires frequent maintenance due to the difficulty in maintaining a tight seal with the large diameter valves needed for sealing the legs.

Secondly, as reactors have gotten larger, logistic problems are presented by the settling legs. If a pipe diameter is doubled the volume of the reactor goes up four-fold. However, because of the valve mechanisms involved, the size of the settling legs cannot easily be increased further. Hence the number of legs required begins to exceed the physical space available.

In spite of these limitations, settling legs have continued to be employed where olefin polymers are formed as a slurry in a liquid diluent. This is because, unlike bulk slurry polymerizations (i.e. where the monomer is the diluent) where solids concentrations of better than 60 percent are routinely obtained, olefin polymer slurries in a diluent are generally limited to no more than 37 to 40 weight percent solids. Hence settling legs have been believed to be necessary to give a final slurry product at the exit to the settling legs of greater than 37-40 percent. This is because, as the name implies, settling occurs in the legs to thus increase the solids concentration of the slurry finally recovered as product slurry.

Another factor affecting maximum practical reactor solids is circulation velocity, with a higher velocity for a given reactor diameter allowing for higher solids since a limiting factor in the operation is reactor fouling due to polymer build up in the reactor.

35 **SUMMARY OF THE INVENTION**

It is an object of this invention to produce olefin polymers as a slurry in a liquid diluent utilizing continuous product slurry takeoff;

It is a further object of this invention to operate a slurry olefin polymerization process in a diluent at a reactor solids concentration high enough to make direct continuous product takeoff commercially viable;

It is a further object of this invention to operate a slurry olefin polymerization process in a diluent at higher circulation velocities.

It is yet a further object of this invention to operate a slurry olefin polymerization process in a diluent in a reaction zone of greater than 30,000 gallons; and

45 It is still yet a further object of this invention to provide a loop reactor apparatus having a capacity of greater than 30,000 gallons and having a continuous take off means.

In accordance with one aspect of this invention, an olefin polymerization process is carried out at a higher reactor solids concentration by means of continuous withdrawal of product slurry.

In accordance with another aspect of this invention, a loop reactor olefin polymerization process is carried out by operating at a higher circulation velocity for a given reactor pipe diameter.

50 In accordance with another aspect of this invention, a loop polymerization apparatus is provided having an elongated hollow appendage at a downstream end of one of the longitudinal segments of the loop, the hollow appendage being in direct fluid communication with a heated flash line and thus being adapted for continuous removal of product slurry.

55 **BRIEF DESCRIPTION OF THE DRAWINGS**

In the drawings, forming a part hereof, Fig. 1 is a schematic perspective view of a loop reactor and polymer recovery

ery system; Fig. 2 is cross section along line 2-2 of Fig. 1 showing a continuous take off appendage; Fig. 3 is a cross section along line 3-3 of Fig 2 showing a ram valve arrangement in the continuous take off assembly; Fig. 4 is a cross section of a tangential location for the continuous take off assembly; Fig. 5 is a side view of an elbow of the loop reactor showing both a settling let and continuous take off assemblies; Fig. 6 is a cross section across line 6-6 of Fig. 5 showing the orientation of two of the continuous take off assemblies; Fig. 7 is a side view showing another orientation for the continuous take off assembly; Fig. 8 is a cross sectional view of the impeller mechanism; Fig. 9 is a schematic view showing another configuration for the loops wherein the upper segments 14a are 180 degree half circles and wherein the vertical segments are at least twice as long as the horizontal segments and Fig. 10 is a schematic view showing the longer axis disposed horizontally.

#### DETAILED DESCRIPTION OF THE INVENTION

Surprisingly, it has been found that continuous take off of product slurry in an olefin polymerization reaction carried out in a loop reactor in the presence of an inert diluent allows operation of the reactor at a much higher solids concentration. Commercial production of predominantly ethylene polymers in isobutane diluent has generally been limited to a maximum solids concentration in the reactor of 37-40 weight percent. However, the continuous take off has been found to allow significant increases in solids concentration. Furthermore, the continuous take off itself brings about some additional increase in solids content as compared with the content in the reactor from which it takes off product because of the placement of the continuous take off appendage which selectively removes a slurry from a stratum where the solids are more concentrated. Hence concentrations of greater than 40 weight percent are possible in accordance with this invention.

Throughout this application, the weight of catalyst is disregarded since the productivity, particularly with chromium oxide on silica, is extremely high.

Also surprisingly, it has been found that more aggressive circulation (with its attendant higher solids concentration) can be employed. Indeed more aggressive circulation in combination with the continuous take off, solids concentrations of greater than 50 weight percent can be removed from the reactor by the continuous take off. For instance, the continuous take off can easily allow operating at 5-6 percentage points higher; i.e., the reactor can be adjusted to easily raise solids by 10 percent; and the more aggressive circulation can easily add another 7-9 percentage points which puts the reactor above 50 percent. But, because the continuous take off is positioned to take off slurry from a stratum in the stream which has a higher than average concentration of solids, the product actually recovered has about 3 percentage points (or greater) higher concentration than the reactor slurry average. Thus the operation can approach an effective slurry concentration of 55 weight percent or more, i.e. 52 percent average in the reactor and the removal of a component which is actually 55 percent (i.e. 3 percentage points) higher.

It must be emphasized that in a commercial operation as little as a one percentage point increase in solids concentration is of major significance. Therefore going from 37-40 average percent solids concentration in the reactor to even 41 is important; thus going to greater than 50 is truly remarkable.

The present invention is applicable to any olefin polymerization in a loop reactor utilizing a diluent so as to produce a product slurry of polymer and diluent. Suitable olefin monomers are 1-olefins having up to 8 carbon atoms per molecule and no branching nearer the double bond than the 4-position. The invention is particularly suitable for the homopolymerization of ethylene and the copolymerization of ethylene and a higher 1-olefin such as butene, 1-pentene, 1-hexene, 1-octene or 1-decene. Especially preferred is ethylene and 0.01 to 10, preferably 0.01 to 5, most preferably 0.1 to 4 weight percent higher olefin based on the total weight of ethylene and comonomer. Alternatively sufficient comonomer can be used to give the above-described amounts of comonomer incorporation in the polymer.

Suitable diluents (as opposed to solvents or monomers) are well known in the art and include hydrocarbons which are inert and liquid under reaction conditions. Suitable hydrocarbons include isobutane, propane, n-pentane, i-pentane, neopentane and n-hexane, with isobutane being especially preferred.

Suitable catalysts are well known in the art. Particularly suitable is chromium oxide on a support such as silica as broadly disclosed, for instance, in Hogan and Banks, US 2,285,721 (March 1958), the disclosure of which is hereby incorporated by reference.

Referring now to the drawings, there is shown in Fig. 1 a loop reactor 10 having vertical segments 12, upper horizontal segments 14 and lower horizontal segments 16. These upper and lower horizontal segments define upper and lower zones of horizontal flow. The reactor is cooled by means of two pipe heat exchangers formed by pipe 12 and jacket 18. Each segment is connected to the next segment by a smooth bend or elbow 20 thus providing a continuous flow path substantially free from internal obstructions. The polymerization mixture is circulated by means of impeller 22 (shown in Fig. 8) driven by motor 24. Monomer, comonomer, if any, and make up diluent are introduced via lines 26 and 28 respectively which can enter the reactor directly at one or a plurality of locations or can combine with condensed diluent recycle line 30 as shown. Catalyst is introduced via catalyst introduction means 32 which provides a zone (location) for catalyst introduction. The elongated hollow appendage for continuously taking off an intermediate product slurry is

designated broadly by reference character 34. Continuous take off mechanism 34 is located in or adjacent to a downstream end of one of the lower horizontal reactor loop sections 16 and adjacent or on a connecting elbow 20.

The continuous take off appendage is shown at the downstream end of a lower horizontal segment of the loop reactor which is the preferred location. The location can be in an area near the last point in the loop where flow turns upward before the catalyst introduction point so as to allow fresh catalyst the maximum possible time in the reactor before it first passes a take off point. However, the continuous take off appendage can be located on any segment or any elbow.

Also, the segment of the reactor to which the continuous take off appendage is attached can be of larger diameter to slow down the flow and hence further allow stratification of the flow so that the product coming off can have an even greater concentration of solids.

The continuously withdrawn intermediate product slurry is passed via conduit 36 into a high pressure flash chamber 38. Conduit 36 includes a surrounding conduit 40 which is provided with a heated fluid which provides indirect heating to the slurry material in flash line conduit 36. Vaporized diluent exits the flash chamber 38 via conduit 42 for further processing which includes condensation by simple heat exchange using recycle condenser 50, and return to the system, without the necessity for compression, via recycle diluent line 30. Recycle condenser 50 can utilize any suitable heat exchange fluid known in the art under any conditions known in the art. However preferably a fluid at a temperature that can be economically provided is used. A suitable temperature range for this fluid is 40 degrees F to 130 degrees F. Polymer particles are withdrawn from high pressure flash chamber 38 via line 44 for further processing using techniques known in the art. Preferably they are passed to low pressure flash chamber 46 and thereafter recovered as polymer product via line 48. Separated diluent passes through compressor 47 to line 42. This high pressure flash design is broadly disclosed in Hanson and Sherk, US 4,424,341 (Jan. 3, 1984), the disclosure of which is hereby incorporated by reference. Surprisingly, it has been found that the continuous take off not only allows for higher solids concentration upstream in the reactor, but also allows better operation of the high pressure flash, thus allowing the majority of the withdrawn diluent to be flashed off and recycled with no compression. Indeed, 70 to 90 percent of the diluent can generally be recovered in this manner. This is because of several factors. First of all, because the flow is continuous instead of intermittent, the flash line heaters work better. Also, the pressure drop after the proportional control valve that regulates the rate of continuous flow out of the reactor has a lower pressure which means when it flashes it drops the temperature lower thus further giving more efficient use of the flash line heaters.

Referring now to Fig. 2, there is shown elbow 20 with continuous take off mechanism 34 in greater detail. The continuous take off mechanism comprises a take off cylinder 52, a slurry withdrawal line 54, an emergency shut off valve 55, a proportional motor valve 58 to regulate flow and a flush line 60. The reactor is run "liquid" full. Because of dissolved monomer the liquid has slight compressibility, thus allowing pressure control of the liquid full system with a valve. Diluent input is generally held constant, the proportional motor valve 58 being used to control the rate of continuous withdrawal to maintain the total reactor pressure within designated set points.

Referring now to Fig. 3, which is taken along section line 3-3 of Fig. 2, there is shown the smooth curve or elbow 20 having associated therewith the continuous take off mechanism 34 in greater detail, the elbow 20 thus being an appendage-carrying elbow. As shown, the mechanism comprises a take off cylinder 52 attached, in this instance, at a right angle to a tangent to the outer surface of the elbow. Coming off cylinder 52 is slurry withdrawal line 54. Disposed within the take off cylinder 52 is a ram valve 62 which serves two purposes. First it provides a simple and reliable clean-out mechanism for the take off cylinder if it should ever become fouled with polymer. Second, it can serve as a simple and reliable shut-off valve for the entire continuous take off assembly.

Figure 4 shows a preferred attachment orientation for the take off cylinder 52 wherein it is affixed tangentially to the curvature of elbow 20 and at a point just prior to the slurry flow turning upward. This opening is elliptical to the inside surface. Further enlargement could be done to improve solids take off.

Figure 5 shows four things. First, it shows an angled orientation of the take off cylinder 52. The take off cylinder is shown at an angle,  $\alpha$ , to a plane that is (1) perpendicular to the centerline of the horizontal segment 16 and (2) located at the downstream end of the horizontal segment 16. The angle with this plane is taken in the downstream direction from the plane. The apex for the angle is the center point of the elbow radius as shown in Fig. 5. The plane can be described as the horizontal segment cross sectional plane. Here the angle depicted is about 24 degrees. Second, it shows a plurality of continuous take off appendages, 34 and 34a. Third, it shows one appendage, 34 oriented on a vertical center line plane of lower segment 16, and the other, 34a, located at an angle to such a plane as will be shown in more detail in Fig. 6. Finally, it shows the combination of continuous take off appendages 34 and a conventional settling leg 64 for batch removal, if desired.

As can be seen from the relative sizes, the continuous take off cylinders are much smaller than the conventional settling legs. Yet three 2-inch ID continuous take off appendages can remove as much product slurry as 14 8-inch ID settling legs. This is significant because with current large commercial loop reactors of 15,000-18,000 gallon capacity, six eight inch settling legs are required. It is not desirable to increase the size of the settling legs because of the difficulty of making reliable valves for larger diameters. As noted previously, doubling the diameter of the pipe increases the volume four-fold and there simply is not enough room for four times as many settling legs to be easily positioned. Hence

the invention makes feasible the operation of larger, more efficient reactors. Reactors of 30,000 gallons or greater are made possible by this invention. Generally the continuous take off cylinders will have a nominal internal diameter within the range of 1 inch to less than 8 inches. Preferably they will be about 2-3 inches internal diameter.

Figure 6 is taken along section line 6-6 of Fig. 5 and shows take off cylinder 34a attached at a place that is oriented at an angle, beta, to a vertical plane containing the center line of the reactor. This plane can be referred to as the vertical center plane of the reactor. This angle can be taken from either side of the plane or from both sides if it is not zero. The apex of the angle is located at the reactor center line. The angle is contained in a plane perpendicular to the reactor center line as shown in Fig. 6.

It is noted that there are three orientation concepts here. First is the attachment orientation, i.e. tangential as in Fig. 4 and perpendicular as in Fig. 2 or 7 or any angle between these two limits of 0 and 90 degrees. Second is the orientation relative to how far up the curve of the elbow the attachment is as represented by angle alpha (Fig. 5). This can be anything from 0 to 60 degrees but is preferably 0 to 40 degrees, more preferably 0 to 20 degrees. Third is the angle, beta, from the center plane of the longitudinal segment (Fig. 6). This angle can be from 0 to 60 degrees, preferably 0 to 45 degrees, more preferably 0-20 degrees.

Fig. 7 shows an embodiment where the continuous take off cylinder 52 has an attachment orientation of perpendicular, an alpha orientation of 0 (inherent since it is at the end, but still on, the straight section), and a beta orientation of 0, i.e. it is right on the vertical centerline plane of the lower horizontal segment 16.

Fig. 8 shows in detail the impeller means 22 for continuously moving the slurry along its flow path. As can be seen in this embodiment the impeller is in a slightly enlarged section of pipe which serves as the propulsion zone for the circulating reactants. Preferably the system is operated so as to generate a pressure differential of at least 18 psig preferably at least 20 psig, more preferably at least 22 psig between the upstream and downstream ends of the propulsion zone in a nominal two foot diameter reactor with total flow path length of about 950 feet using isobutane to make predominantly ethylene polymers. As much as 50 psig or more is possible. This can be done by controlling the speed of rotation of the impeller, reducing the clearance between the impeller and the inside wall of the pump housing or by using a more aggressive impeller design as is known in the art. This higher pressure differential can also be produced by the use of at least one additional pump.

Generally the system is operated so as to generate a pressure differential, expressed as a loss of pressure per unit length of reactor, of at least 0.07, generally 0.07 to 0.15 foot pressure drop per foot of reactor length for a nominal 24 inch diameter reactor. Preferably, this pressure drop per unit length is 0.09 to 0.11 for a 24 inch diameter reactor. For larger diameters, a higher slurry velocity and a higher pressure drop per unit length of reactor is needed. The units for the pressure are ft/ft which cancel out. This assumes the density of the slurry which generally is about 0.5 - 0.6.

Referring now to Fig. 9 the upper segments are shown as 180 degree half circles which is the preferred configuration. The vertical segments are at least twice the length, generally about seven to eight times the length of the horizontal segments. For instance, the vertical flow path can be 190 - 225 feet and the horizontal segments 25 - 30 feet in flow path length. Any number of loops can be employed in addition to the four depicted here and the eight depicted in Fig. 1, but generally four or six are used. Reference to nominal two foot diameter means an internal diameter of about 21.9 inches. Flow length is generally greater than 500 feet, generally greater than 900 feet, with about 940 to 1,350 feet being quite satisfactory.

Commercial pumps for utilities such as circulating the reactants in a closed loop reactor are routinely tested by their manufacturers and the necessary pressures to avoid cavitation are easily and routinely determined.

#### EXAMPLES

A four vertical leg polymerization reactor using a 26 inch Lawrence Pumps Inc. pump impeller D51795/81-281 in a M51879/FAB casing was used to polymerize ethylene and hexene-1. This pump was compared with a 24 inch pump which gave less aggressive circulation (0.66 ft of pressure drop vs 0.98). This was then compared with the same more aggressive circulation and a continuous take off assembly of the type shown by reference character 34 of Fig. 5. The results are shown below.

DATA TABLE			
Description	24 in Pump	26 in Pump	26 in Pump + CTO
Date of Operation	Oct 4-9, 1994	May 24-28, 1995	Nov 15-18, 1996
Avg. Reactor Solids Concentration, wt %	39	45	53

(continued)

DATA TABLE			
Description	24 In Pump	26 In Pump	26 In Pump + CTO
Date of Operation	Oct 4-9, 1994	May 24-28, 1995	Nov 15-18, 1996
Polymer Production Rate, mlbs/hr	40.1	40.7	39.9
Reactor Circulation Pump Power, kw	430	691	753
Circulation Pump Pressure Diff, psi	14.3	22.4	23.7
Circulation Pump Head, ft	61.8	92.5	92.4
Reactor Slurry Flow Rate, mGPM	39	46	45
Reactor Slurry Density, gm/cc	0.534	0.558	0.592
Reactor Temperature, F	215.6	218.3	217.0
Ethylene Concentration, wt %	4.43	3.67	4.9
Hexene-1 Concentration, wt %	0.22	0.17	0.14
Reactor Heat Transfer Coefficient	270	262	241
Reactor Inside Diameter, inches	22.0625	22.0625	22.0625
Reactor Volume, gal	18700	18700	18700
Reactor Length, ft	941	941	941
Pressure Drop per Foot of Reactor, ft/ft	0.066	0.098	0.098

While this invention has been described in detail for the purpose of illustration, it is not to be construed as limited thereby, but is intended to cover all changes within the spirit and scope thereof.

### Claims

1. A polymerization process comprising:

polymerizing, in a loop reaction zone, at least one olefin monomer in a liquid diluent to produce a fluid slurry comprising liquid diluent and solid olefin polymer particles;

maintaining a concentration of said solid olefin polymer particles in said slurry in said zone of greater than 40 weight percent based on the weight of said polymer particles and the weight of said liquid diluent; and

continuously withdrawing a slurry having an increase in solids concentration as compared with said slurry in said zone, the thus withdrawn slurry comprising withdrawn liquid diluent and withdrawn solid polymer particles as an intermediate product of said process.

2. The process of claim 1, wherein said olefin monomer comprises ethylene, in particular wherein said olefin monomer comprises ethylene and 0.01-5 weight percent hexene based on the total weight of said ethylene and said hexene, and wherein said liquid diluent is isobutane.

3. The process of claim 1 or 2, wherein said concentration of said solid olefin polymer particles in said slurry in said zone is greater than 50 weight percent based on the weight of said polymer particles and the weight of said liquid diluent.

4. The process of any of claims 1 to 3, wherein a pressure differential of at least 0.124 MPa gauge (18 psig) is maintained in a propulsion zone to circulate said slurry through said reaction zone.

5. The process of any of claims 1 to 3, wherein a pressure differential of greater than 21.3 per mm (0.07 per foot) of reactor flow path length is maintained in a propulsion zone, in particular wherein said differential is within the range of 21.3 to 45.7 mm/mm per mm (0.07 to 0.15 ft/ft per foot) of said reactor flow path length.



6. The process of any of the preceding claims, wherein said reaction zone is maintained liquid full.
7. The process of any of the preceding claims, wherein said reaction zone has a volume of greater than 75.7 m<sup>3</sup> (20,000 gallons), preferably of greater than 113.6 m<sup>3</sup> (30,000 gallons).
- 5 8. The process of any of the preceding claims, wherein said intermediate product of said process is continuously passed through a heating zone wherein said intermediate product is heated to produce a heated intermediate product and thereafter said heated intermediate product is exposed to a pressure drop in a high pressure flash zone, said heated intermediate product being heated to an extent such that a major portion of said withdrawn liquid diluent is vaporized and thus separated from said withdrawn solid polymer particles, the thus separated withdrawn liquid diluent thereafter being condensed for recycle, without any compression, by heat exchange with a fluid having a temperature within the range of 4 to 54°C (40 to 130 degrees F).
- 10 9. The process of any of the preceding claims, wherein said slurry is continuously withdrawn from an area near the last point in said loop reaction zone where flow turns upward before a catalyst introduction zone.
- 15 10. The process of any of claims 1 to 8, wherein said slurry is continuously withdrawn from at least one area adjacent the end of a lower zone of horizontal flow.
- 20 11. The process of claim 10, wherein said slurry is withdrawn at a point along the vertical centerline plane of said lower zone of horizontal flow and prior to said flow turning upward.
12. The process of claim 10, wherein said at least one area is along the vertical centerline plane of said lower zone of horizontal flow and after said flow has turned upward.
- 25 13. The process of claim 10, wherein said at least one area is oriented at an angle away from the vertical center plane of said lower zone of horizontal flow an amount within the range of 0 to 45 degrees.
- 30 14. The process of claim 13, wherein said at least one area is oriented away from said vertical center plane at an angle within the range of 0 to 20 degrees.
- 15 15. The process of claim 13, wherein said at least one area is prior to said flow turning upward.
- 35 16. The process of claim 13, wherein said at least one area is at a location after said flow has turned upward at least 1 but less than 45 degrees from a centerline of upward flow.
17. The process of claim 10, wherein said at least one area is exactly one area, or is a plurality of areas.
- 40 18. A polymerization process comprising:  
polymerizing, in a loop reaction zone, at least one olefin monomer in a liquid diluent to produce a fluid slurry comprising liquid diluent and solid olefin polymer particles;  
withdrawing said slurry comprising withdrawn liquid diluent and withdrawn solid polymer particles by alternately carrying out the following steps:  
45 (A) allowing said slurry to settle into at least one settling zone and thereafter withdrawing a batch of the thus settled slurry from said settling zone as an intermediate product of said process, thereafter shutting off said settling zone; and  
50 (B) thereafter continuously withdrawing said slurry comprising withdrawn liquid diluent and withdrawn solid polymer particles as an intermediate product of said process.
- 55 19. The process of claim 18, comprising in addition adjusting reactor conditions during startup of step (B) to raise reactor solids by at least 10 percent.
20. A loop reactor apparatus comprising:

a plurality of vertical segments;

a plurality of upper horizontal segments;

5 a plurality of lower horizontal segments;  
wherein each of said vertical segments is connected at an upper end thereof by a smooth upper bend to one of said upper horizontal segments, and is connected at a lower end thereof by a smooth lower bend to one of said lower horizontal segments thus defining a continuous flow path adapted to convey a fluid slurry, said reactor being substantially free from internal obstructions;

10 means for introducing monomer reactant, polymerization catalyst and diluent into said reactor;

means for continuously moving said slurry along said flow path;

15 at least one elongated hollow appendage adjacent a downstream end of one of said lower horizontal sections, said appendage being in open communication with said flow path for continuously withdrawing product slurry; and

20 an elongated flash line in fluid communication with said appendage for transferring product slurry from said appendage to a flash means, said flash line having a heater associated therewith to heat said product slurry.

21. The apparatus of claim 20, wherein said at least one appendage is attached to one of said lower horizontal segments thus giving an appendage-carrying lower horizontal segment, said appendage being oriented along a vertical centerline plane of said appendage-carrying lower horizontal segment and adjacent to the smooth lower bend attached to the downstream end of said appendage-carrying lower horizontal segment.

22. The apparatus of claim 20, wherein said appendage is attached at an angle between 0 to 90 degrees.

23. The apparatus of claim 20, wherein said at least one appendage is attached to said smooth bend attached to said downstream end of said appendage-carrying lower horizontal segment thus giving an appendage-carrying smooth bend.

24. The apparatus of claim 23, wherein said appendage is attached to said appendage-carrying smooth bend at a point at least 1 but less than 45 degrees from a centerline of the adjacent vertical segment.

25. The apparatus of claim 24, wherein said at least one appendage is attached at a right angle to an tangent to said appendage-carrying bend.

26. The apparatus of claim 24, wherein said at least one appendage is attached tangentially to said appendage-carrying bend.

27. The apparatus of claim 26, wherein said at least one appendage is attached at a point spaced away from said vertical center plane an amount within the range of 20 - 45 degrees.

28. The apparatus of claim 26, wherein said at least one appendage is exactly one appendage, or is a plurality of appendages.

29. A polymerization process comprising:

50 polymerizing, in a loop reaction zone, at least one olefin monomer using a catalyst comprising chromium oxide on a support in a liquid diluent to produce a fluid slurry comprising liquid diluent and solid olefin polymer particles;

maintaining a concentration of said solid olefin polymer particles in said slurry in said zone of greater than 40 weight percent based on the weight of said polymer particles and the weight of said liquid diluent; and

continuously withdrawing slurry comprising withdrawn liquid diluent and withdrawn solid polymer particles as an intermediate product of said process.

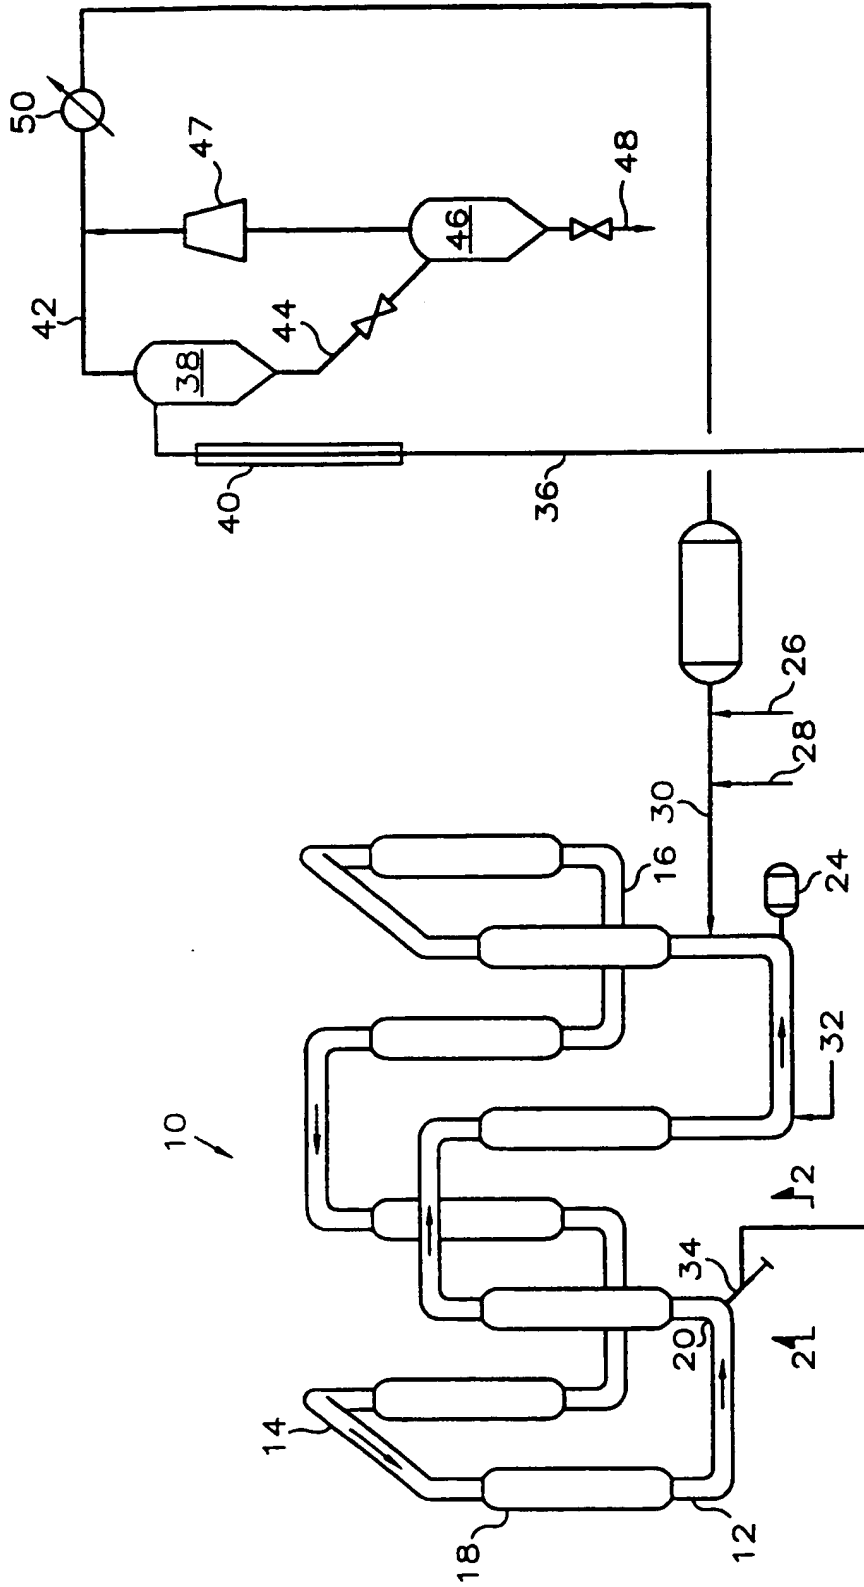


FIG. 1

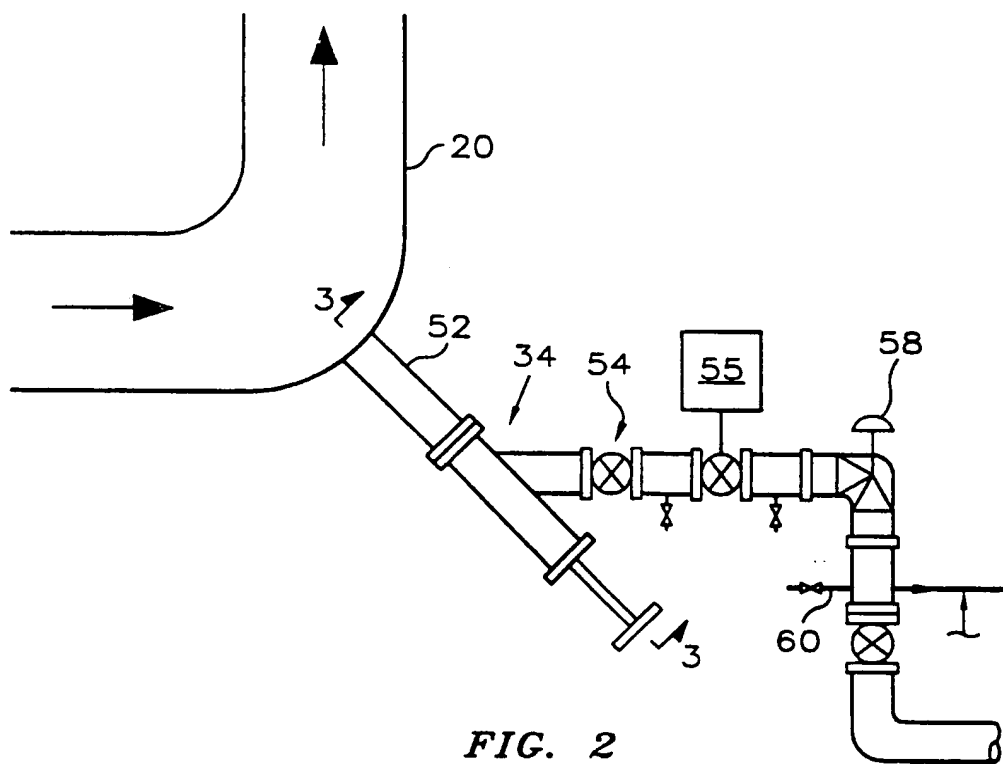


FIG. 2






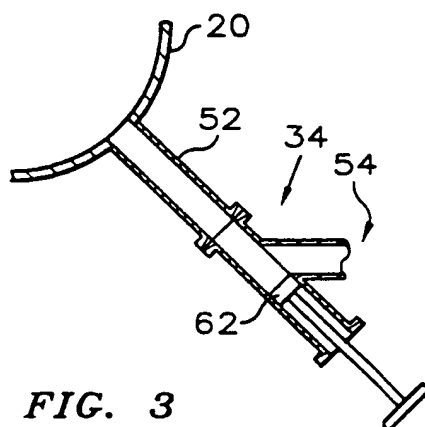


FIG. 3

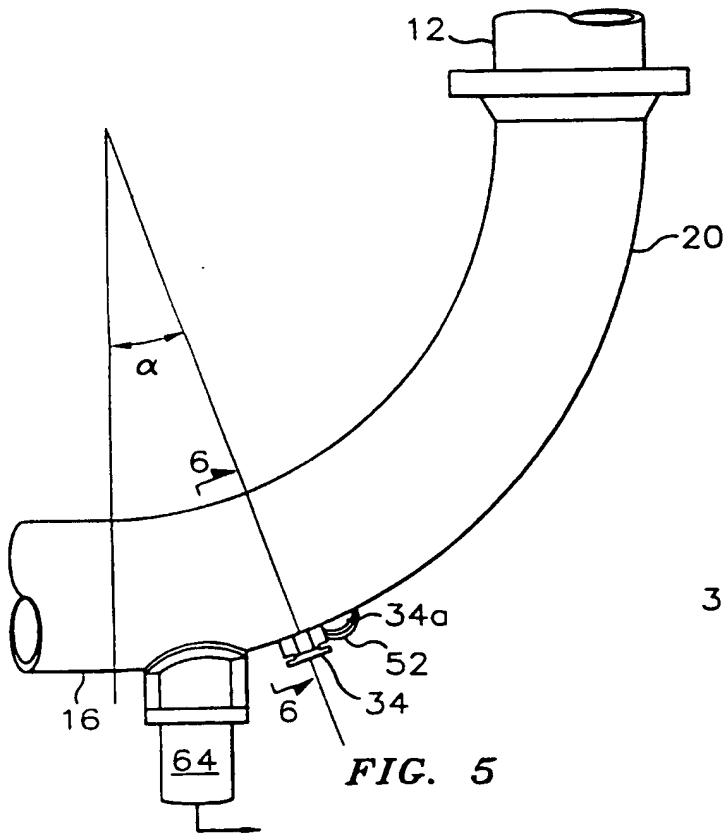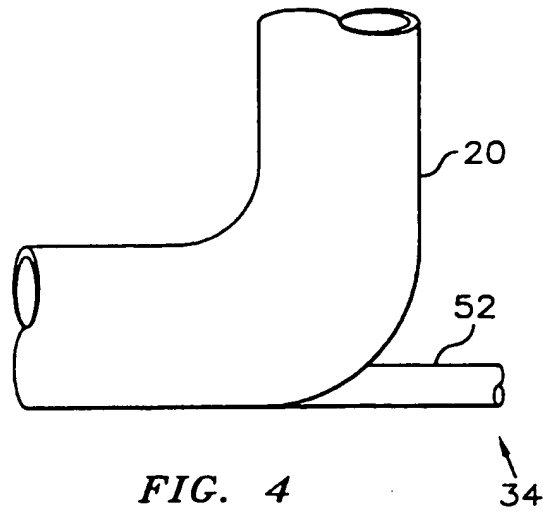


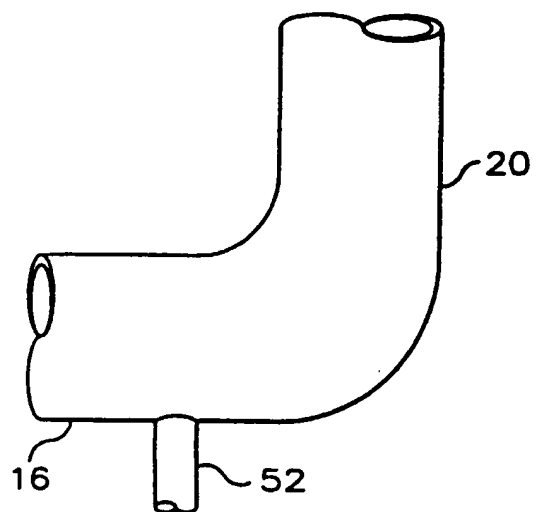


**FIG. 7**

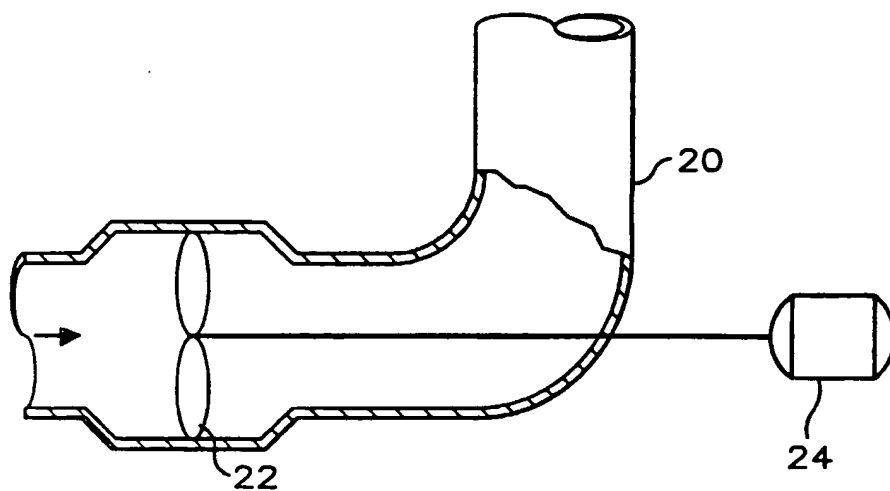

**FIG. 8**

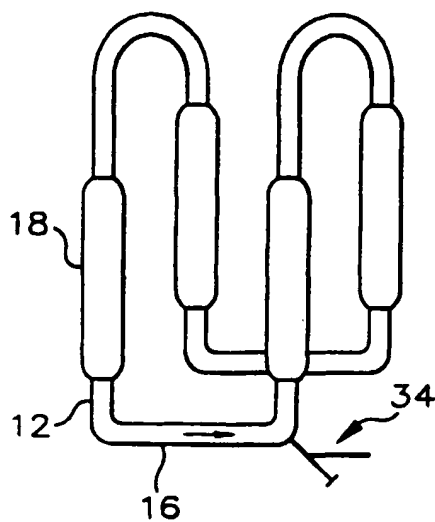

**FIG. 9**

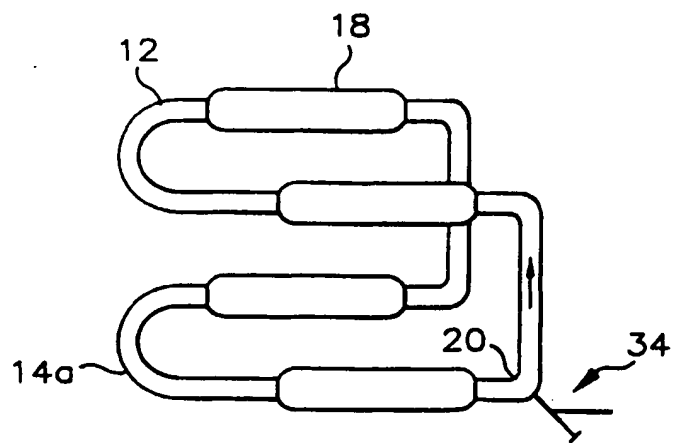

**FIG. 10**

**THIS PAGE BLANK (USPTO)**





Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) EP 0 891 990 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
10.11.1999 Bulletin 1999/45

(51) Int. Cl.<sup>6</sup>: C08F 10/00, C08F 2/14

(43) Date of publication A2:  
20.01.1999 Bulletin 1999/03

(21) Application number: 98113059.4

(22) Date of filing: 14.07.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 15.07.1997 US 893200

(71) Applicant:  
PHILLIPS PETROLEUM COMPANY  
Bartlesville Oklahoma (US)

(72) Inventors:  
• Hottovy, John Douglas  
Bartlesville, Oklahoma 74006 (US)  
• Hensley, Harvey Dean  
Bartlesville, Oklahoma 74006 (US)

• Przelomski, David Joseph  
Houston, Texas 77062 (US)  
• Cymbaluk, Teddy Henry  
Seabrook, Texas 77586 (US)  
• Franklin, Robert Kyle, III  
Houston, Texas 77059 (US)  
• Perex, Ethelwoldo P.  
Sugar Land, Texas 77479 (US)

(74) Representative:  
Dost, Wolfgang, Dr.rer.nat., Dipl.-Chem. et al  
Patent- und Rechtsanwälte  
Bardehle . Pagenberg . Dost . Altenburg .  
Geissler . Isenbruck  
Galileiplatz 1  
81679 München (DE)

(54) High solids slurry polymerization

(57) An olefin polymerization process wherein monomer, diluent and catalyst are circulated in a continuous loop reactor and product slurry is recovered by means of a continuous product take off. The continuous product allows operating the reaction at significantly higher solids content in the circulating slurry. In a preferred embodiment, the slurry is heated in a flash line heater

and passed to a high pressure flash where a majority of the diluent is separated and thereafter condensed by simple heat exchange, without compression, and thereafter recycled. Also an olefin polymerization process operating at higher reactor solids by virtue of more aggressive circulation.

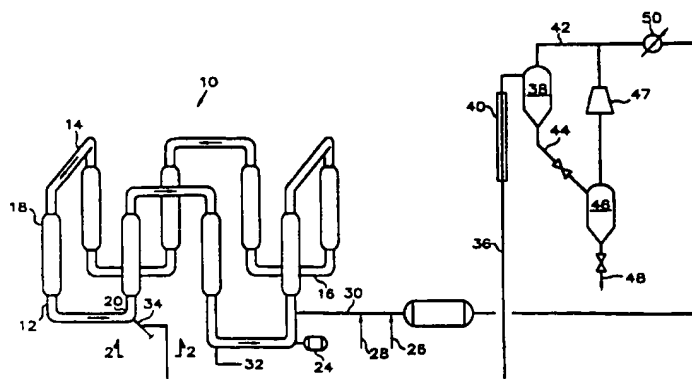


FIG. 1

EP 0 891 990 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 11 3059

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D,X	US 4 424 341 A (HANSON DONALD O ET AL) 3 January 1984 (1984-01-03)	20-28	C08F10/00
A	* the whole document *	1-19,29	C08F2/14
	---		B01J19/18
X	EP 0 415 427 A (PHILLIPS PETROLEUM CO) 6 March 1991 (1991-03-06)	20-28	B01J19/24
	* the whole document *		B01J4/00
	---		
X	EP 0 432 555 A (PHILLIPS PETROLEUM CO) 19 June 1991 (1991-06-19)	1,18,20,29	
	* claims; figures *		
	---		
X	US 4 613 484 A (SHERK FRED T ET AL) 23 September 1986 (1986-09-23)	20	
	* claims; figures *		
	---		
A	US 5 455 314 A (BURNS DAVID H ET AL) 3 October 1995 (1995-10-03)	1-29	
	* the whole document *		
	-----		
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			C08F B01J
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 17 September 1999	Examiner KAUMANN, E
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 11 3059

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-09-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4424341 A	03-01-1984	NONE	
EP 0415427 A	06-03-1991	US 5183866 A AT 122689 T CA 2018920 A,C DE 69019439 D DE 69019439 T ES 2072340 T HU 209740 B JP 2701968 B JP 3093806 A MX 171494 B NO 175209 B	02-02-1993 15-06-1995 28-02-1991 22-06-1995 14-09-1995 16-07-1995 28-10-1994 21-01-1998 18-04-1991 29-10-1993 06-06-1994
EP 0432555 A	19-06-1991	CA 2023745 A JP 3181501 A	28-05-1991 07-08-1991
US 4613484 A	23-09-1986	NONE	
US 5455314 A	03-10-1995	US 5565174 A	15-10-1996

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**